

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Master GN counter 2 doors

**Model:** TA13/1M-710

**Cod:** T10202000201



Tavolo refrigerato Master piano con alzatina, Plug-In, 2 porte con altezza corpo tavolo 710 mm, classe energetica A, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Completo di 1 griglia GN1/1, configurabile con cassettiere 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

## Technical data

|                                 |                                 |
|---------------------------------|---------------------------------|
| <b>Top:</b>                     | With top and splashback         |
| <b>Gross capacity:</b>          | 280 lt                          |
| <b>Temperature range:</b>       | -2°+8°C                         |
| <b>Refrigerant unit:</b>        | Plug-In                         |
| <b>Energetic class:</b>         | A                               |
| <b>Energy efficiency index:</b> | 23,3                            |
| <b>Annual consumption:</b>      | 527 kW/h annum                  |
| <b>24h consumption:</b>         | 1,444 kW/h/24h                  |
| <b>Climate class:</b>           | 5                               |
| <b>Cooling gas:</b>             | R290                            |
| <b>Defrost:</b>                 | Hot gas                         |
| <b>Body height:</b>             | 710 mm                          |
| <b>Valve:</b>                   | Supplied standard with solenoid |
| <b>Dimensions:</b>              | 1300×700×950 mm                 |
| <b>Packing dimensions:</b>      | 1395×800×998 mm                 |
| <b>Gross weight:</b>            | 140 Kg                          |
| <b>Voltage:</b>                 | 220-240 V - 50 Hz               |
| <b>Total rate:</b>              | 250 W                           |
| <b>Absorbed Current:</b>        | 1,15 A                          |
| <b>Cooling capacity:</b>        | 406 W*                          |
| <b>*:</b>                       | Evap. -10°C Cond. +55°C         |

## Features


|                                     |                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------|
| <b>Standard equipment:</b>          | 2 slides, 2 plastic coated GN1/1 shelves                                          |
| <b>Control:</b>                     | Electronic, display flush with the panel                                          |
| <b>Doors:</b>                       | 2 doors, self-closing, reversible with 105° stop                                  |
| <b>Door gasket:</b>                 | Magnetic, triple chamber and easily replaceable                                   |
| <b>Insulation:</b>                  | 60 mm thickness - CFC/HCFC free                                                   |
| <b>Exterior/interior finishing:</b> | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel |
| <b>Inner corners:</b>               | Rounded for easy cleaning and ensuring maximum hygiene                            |
| <b>Handle:</b>                      | Stainless steel AISI 304, 2 mm thick                                              |
| <b>Racks and slides:</b>            | Stainless steel AISI 304                                                          |
| <b>Feets:</b>                       | Stainless steel AISI 304, adjustable h 100-150 mm                                 |
| <b>Cosmo:</b>                       | Ready for connection to Cosmo Hub                                                 |

## Accessories and variants

|                                     |                                                      |
|-------------------------------------|------------------------------------------------------|
| Drawers 1/2                         | Granite flat worktop                                 |
| Drawers 1/3                         | Granite worktop with splashback                      |
| Drawers 1/3 + 2/3                   | Service water sink Ø 300 mm                          |
| Special counter body heights 650 mm | Single lever mixer hole Ø 3/4                        |
| Special counter body heights 700 mm | Adjustable feet h 145/195 mm                         |
| Special counter body heights 750 mm | 4 Swivel and brake castors h 128 mm                  |
| Technical compartment on the left   | Brackets for GN pans for drawer                      |
| Lock with key for drawer 1/2        | GN1/2 container + lids kit for drawer, h 150 mm      |
| Lock with key for drawer 1/3        | GN1/3 container + lids kit for drawer, h 150 mm      |
| Lock with key for drawer 1/3 + 2/3  | Bottles shelf, stainless steel coating for shelf 350 |
| Glass door                          | Stainless steel shelf GN1/1                          |
| LED lighting                        | Plastic coated shelf GN1/1                           |
| RAL customisable colouring          | Pair of type C slides 505 mm                         |
| Plug-in water unit                  | Serial interface, RS485 cable                        |
| Stainless steel evaporator          | Cosmo connection kit                                 |
| Power supply frequency 60Hz         | IP44 schuko socket with cover                        |
| Other special voltage               | Removable plinth GN 2D h 50 mm                       |
| Internal hygiene H3                 | Removable plinth GN 2D h 100 mm                      |

\*The installation requires a kit for the replacement of the racks

## Technical draw

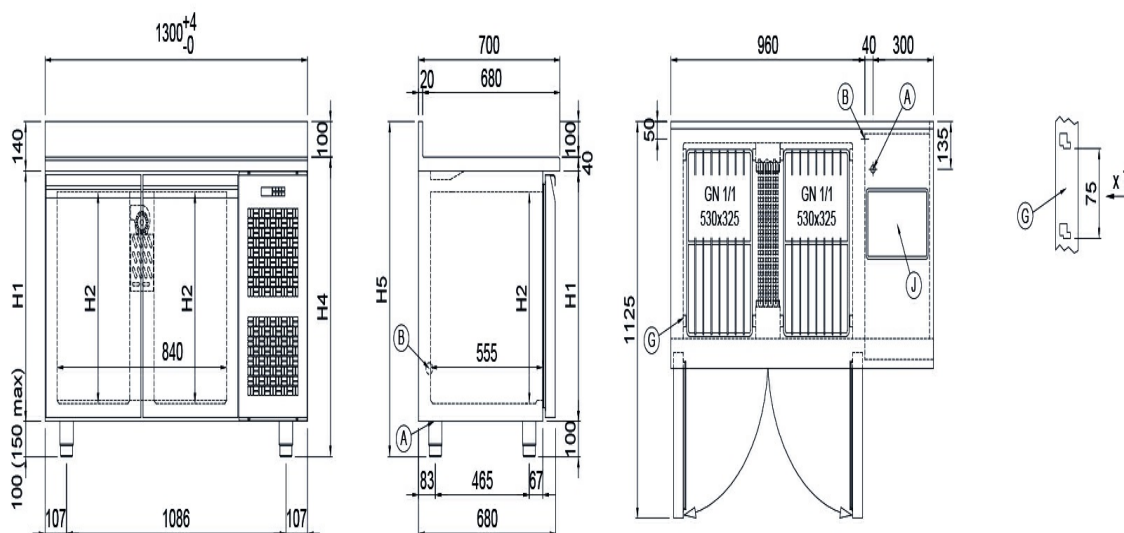

| H1  | H2  | H4  | H5  |
|-----|-----|-----|-----|
| 710 | 600 | 850 | 950 |

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water